

# PİSTONLU POMPALAR

## PISTON PUMPS

### POMPES A PISTON

PİSTONLU HİDROLİK POMPA  
PISTON HYDRAULIC PUMP  
POMPE HYDRAULIQUE A PISTONS

## P-9100-01



Uygun Vizkozite Aralığı  
Optimum Viscosity Field  
Viscosité Optimum Convenable


cST15  
cST35

Çalışma Sıcaklığı  
Working Temperature  
Température d'Opération

-10 °C  
+80 °C

Dönüş Yönü  
Direction Of Rotation  
Direction De Rotation

Sağ ve Sol  
Right & Left  
Droite & Gauche

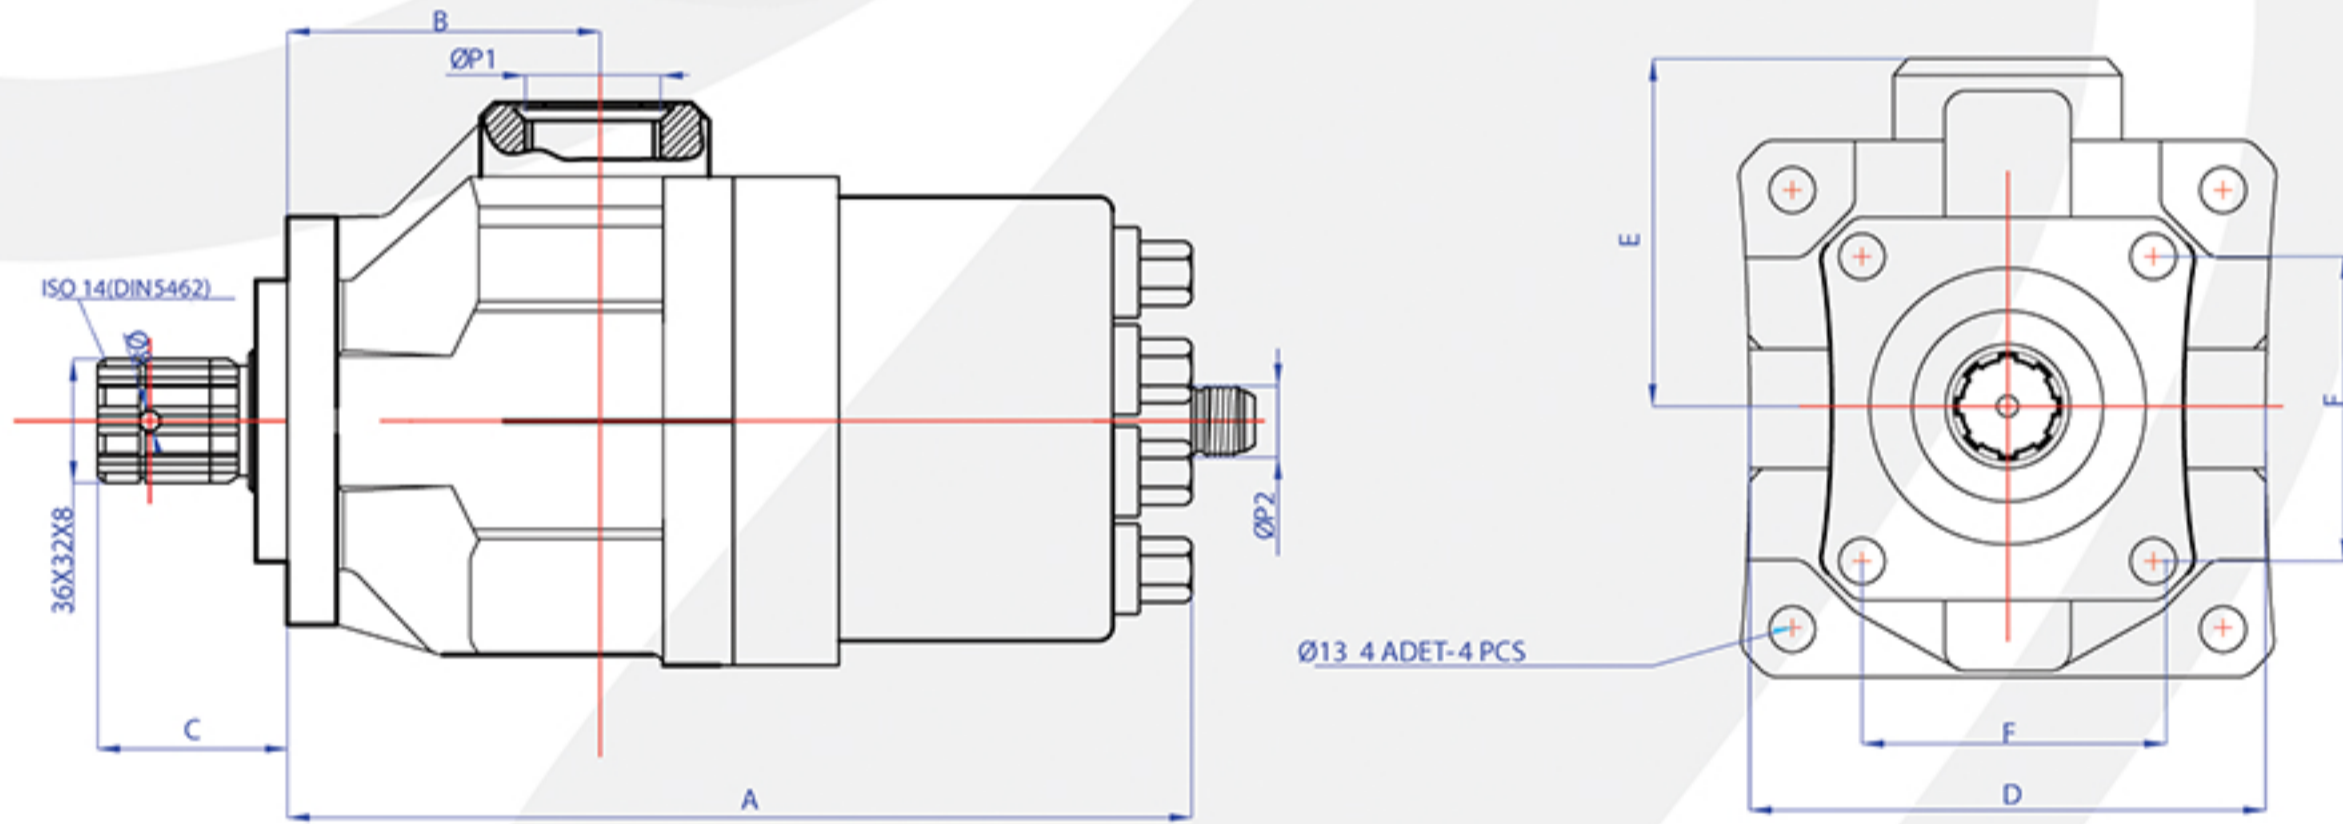

#### TEKNİK VERİLER - TECHNICAL DATAS - DONNES TECHNIQUE

Tip - Kod Type - Code	Debi Verim Deby / Débit 1000 d.dk / Rpm Tr / Min	Çalışma Basıncı Working Pressure Pression de Travail	Test Basıncı Test Pressure Pression d'Essais	Çalışma Devri Revolution Working Puissance de Travail D./Dak R./M. - Tr/Min.	Maksimum Devir Maximum Revolution Puissance Maximum D./Dak R./M. - Tr/Min.	Ağırlık Weight Poid
P-9100-01	100 Lt	220 Bar	300 Bar	1300	1500	20.30 Kg
P-9080-01	80 Lt	225 Bar	300 Bar	1300	1500	20.23 Kg

Tip / Type	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Φ P1 Giriş Inlet / Aspiration	Φ P2 Çıkış Outlet / Sortie
P-9100-01	255	85	53	129	90	80	G 1 1/4"	1 1/16"
P-9080-01	255	85	53	129	90	80	G 1 1/4"	1 1/16"